


## COVEROCK-V - Cutting Guide

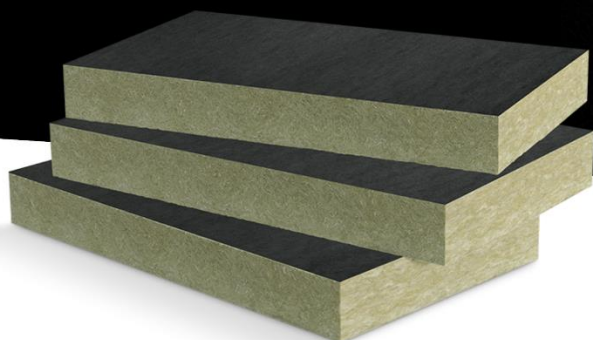

**COVEROCK**  
INSULATION

**COVEROCK: Coverock-V** Black glass surface finish is designed for use in Rainscreen cladding systems that require a black surface finish due to the material being visible behind Rainscreen cladding open joints.

The **Coverock-V** Black glass surface finish is due to the materials visibility behind the external cladding, the Black surface finish is mainly for an aesthetic look where visible between the claddings open joints exposing the surface behind, but, also to assist the longevity of the product.

When cutting **Coverock-V** Black glass surface finish, the insulation should be laid down on a flat rigid surface with the black glass surface finish facing up, caution is required between the hilt of the knife or saw being used and the facing of the insulation, avoiding puncturing the Black glass surface finish.

The Knife or Saw being used to achieve a sharp precise cut should have a serrated edge, so a dedicated insulation knife or saw, a steady motion when cutting, ensuring you cut along the line as marked, measure twice cut once, taking your time, the better the finish the better the fit.

To eradicate or keep to a minimum damage to the Black glass surface finish, keep the product in its original packaging until installation where possible, at this point, take extreme care not to mark the surface, do not stack face to face, making sure when traversing up scaffolding you use the original packaging to protect the top layer.

Please contact Coverock for further information if required.  
[info@coverock.co.uk](mailto:info@coverock.co.uk)